

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : B41F 33/00, H04N 7/18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/08791 (43) International Publication Date: 28 April 1994 (28.04.94)</p>
<p>(21) International Application Number: PCT/FI93/00424 (22) International Filing Date: 15 October 1993 (15.10.93) (30) Priority data: 924686 16 October 1992 (16.10.92) FI (71) Applicant (for all designated States except US): INSINÖÖR-ITOIMISTO DATA OY [FI/FI]; Insinöörinkatu 2, FIN-00810 Helsinki (FI). (72) Inventor; and (75) Inventor/Applicant (for US only) : KAIVOSOJA, Juhani [FI/FI]; Heinäpellonpolku 6 B, FIN-00700 Helsinki (FI). (74) Agent: LEITZINGER OY; Ruoholahdenkatu 8, FIN-00180 Helsinki (FI).</p>		<p>(81) Designated States: DE, GB, SE, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>

(54) Title: APPARATUS FOR THE QUALITY CONTROL OF A PRINT PRODUCED BY A PRINTING MACHINE

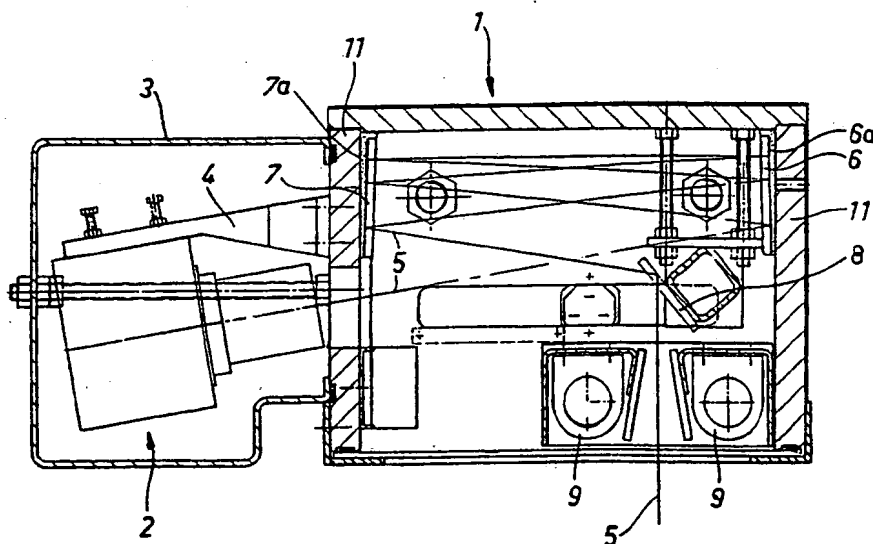

(57) Abstract

The invention relates to an apparatus for the quality control of a print produced by a printing machine. The apparatus includes a CCD camera (2) and a measuring girder (1), extending substantially across the width of a printing surface to be controlled. A path (5) of light coming from a printing surface to camera (2) is provided with mirrors (6, 7, 8) arranged in a manner such that the light of said path (5) reflects from mirrors (6, 7, 8) several times, whereby the distance covered by the light coming from a printing surface to camera (2) is multiple when compared to the distance between camera and printing surfaces. The mir-

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TC	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

Apparatus for the quality control of a print produced by a printing machine

The present invention relates to an apparatus for the quality control of a print produced by a printing machine. The apparatus comprises a CCD camera and a measuring girder having a length which essentially covers the width of a printing surface to be controlled.

A problem in the printing industry and especially in newspaper printing is the quality control of printed matter from a high-speed web of paper. In newspaper production, a paper emerges as a finished product from a printing machine and, thus, it cannot be checked afterwards except by picking up the product and glancing through it.

Quality problems result from malfunctions occurring in the watering or inking device of an offset printing machine, such as accumulation of paper dust in pipe systems, mechanical and electrical malfunctions or just inadequate maintenance. A reader experiences the quality problems as poor quality printing either in part of a page or in several pages. The problem becomes even more pronounced if a poor quality page carries a sizable advertisement or several advertisements since advertisements represent a major source of income for a newspaper.

In so-called roll-to-roll printing machines, the printing industry has earlier employed a web inspection device which was based on a rotating mirror polygon which, upon rotating at a correct speed, brought the web to a halt for inspection. Such a device required an operating person and was therefore only used for occasional inspection. At present, this application has been replaced by a CCD

camera, which snatches an image of a web of paper onto a colour monitor to be inspected by a printer. There are also measuring girders carrying a plurality of CCD cameras side by side and measuring girders effecting the measurement by means of separate optical transducers.

These products as such are good but expensive. A newspaper printing machine usually includes one to six webs of paper, whereby the number of such measuring devices should be twice that of the webs as a newspaper page is printed on both sides. The existing products are difficult to apply for measuring a wide web of paper as there will be a long distance between the camera and the object to be measured. In a heavy-duty printing machine there is very little space available and hence, in addition to being inexpensive, the product must also be sufficiently small. The environmental aspects of a printing machine are also demanding: the conditions are humid (even wet) and temperature may rise up to 30°C.

An object of the invention is to provide such a competitively priced product for resolving the above technical problem which fulfils the spatial and environmental requirements set by a printing machine.

This object is achieved by means of a measuring bar according to the characterizing features set forth in the annexed claim 1.

The invention will now be described in more detail with reference made to the accompanying drawings, in which

fig. 1 shows a measuring girder according to a first embodiment of the invention in cross-section;

- fig. 2 shows a measuring girder according to a second embodiment of the invention in cross-section;
- fig. 3 shows a plan view and an end view of the measuring girder of fig. 1;
- fig. 4 shows a plan view and an end view of the measuring girder of fig. 2;
- fig. 5 shows a diagrammatic view of an apparatus assembly for using the measuring girders of the invention in newspaper printing for controlling the quality of print.

A measuring girder 1 of the invention is provided with a CCD line camera 2 for measuring darkness variations in the printing surface of a moving web of paper.

The CCD camera 2 includes e.g. 1024 measuring elements for measuring a moving web transversely to the traveling direction. Camera 2 can be optionally provided with a CCD circuit of 2500 elements, making it capable of measuring yet smaller details. The light source illuminating a printing surface to be controlled is provided by fluorescence tubes 9 operated at a frequency of 30 kHz. The light of fluorescence tubes covers the range of visible light sufficiently well, the IR radiation thereof is low and 30 kHz brings the disturbance level sufficiently low.

The optical distance from a measuring object, i.e. the distance between a printing surface and a CCD camera, is achieved by means of surface and normal mirrors. The path of light traveling from a printing surface to camera 2 is provided with mirrors 6, 7, 8 which are positioned such

that the light of said path 5 reflects from the mirrors several times, whereby the distance covered by the light traveling from printing surface to camera is multiple compared to the distance between the camera and the printing surface. Since the light reflected from a measuring object "ricochets" between mirrors 6 and 7 several times, it will travel a distance required for covering a sufficiently wide measuring range by means of camera 2. This detail provides the actual invention. The use of mirrors is an inexpensive way of "packing" a measuring apparatus into a compact size and yet of using a standard CCD line camera as the measuring head.

The assembly requires a sturdy framework for the optics to operate properly. The framework is made e.g. of aluminium, which is pressed to a predetermined profile. The main mirrors 6 and 7 are glued to side walls 11 of a girder opposite to each other by means of a special jig, the thickness of adhesive layers 6a, 7a being determined such that mirrors 6, 7 set at a proper angle. There is an angular variation of 2-5 degrees between the alignments of the mirrors for producing said reciprocal reflection occurring several times between the mirrors. Reference numeral 5 is used to designate a path of light from a printing surface to a line produced by CCD elements included in the camera. The reading range of camera 2 can be adjusted by adjusting the camera and by means of one or two mirrors 8 and 10 depending on which side of the girder the camera is to be mounted.

In the embodiment of figs. 1 and 3, said camera 2 is mounted alongside girder 1 below a protective hood 3 for easy maintenance of the camera. If the available space does not allow the mounting of a camera alongside a girder, it can be mounted on top of a girder, as shown in

the embodiment of figs. 2 and 4. This requires one more mirror 10. The girder is sealed and a window for reading the degree of darkness of a print on a web of paper is maintained clean with compressed air.

In the embodiment of figs. 1 and 2, the alignment or direction of mirrors 6 and 7 deviates by 1,6 degrees from the vertical plane. The mirror 8 is set in a manner such that the path 5 between itself and mirror 7 deviates by appr. 10 degrees from the horizontal plane. With this arrangement the light path 5 can be made sufficiently long for mounting a standard production CCD line camera directly on measuring girder 1 without any substantial spacing between girder and camera.

The data processing is carried out in a micro-computer QCC (Fig. 5) mounted outside the girder in the vicinity of girder 1. A single computer QCC is capable of processing the measuring results of two measuring girders 1. Up to 16 units of micro-computers can be connected in series. The control thereof is effected by way of a master computer, which is a standard PC type 386 SX. The communication between computers QCC occurs along an RS485 path employing a single twin wire.

The apparatus measures normally a 1-2 mm wide zone/measuring element, depending on the web width. The computer QCC sums up a plurality of adjacent zones, the total number of which is used for calculating an average. The operator gives an acknowledgement to the apparatus upon verifying that the product is of good quality. The apparatus stores the data as reference information in a memory. If the quality of print decreases below an accepted fluctuation range (which is adjustable), the apparatus produces an alarm or takes predetermined

actions.

Although the apparatus is specifically developed for the quality control of a newspaper print, a measuring girder of the invention can be used for several other purposes both in the printing industry and elsewhere. The printing surface to be monitored can be on paper, cardboard, plastic film, aluminium foil or printing plate. The basic requirement is that a target or an object to be measured is in motion relative to the measuring apparatus or, respectively, the measuring apparatus is in motion.

The measuring accuracy depends on the traveling speed of a controlled printing surface relative to a camera and on the exposure time of a camera, the latter in turn depending on lighting conditions. A normal speed range is 1-13 m/s but it can also be slower or faster.

Claims

1. An apparatus for the quality control of a print produced by a printing machine, said apparatus comprising a CCD camera (2) and a measuring girder (1) having a length which substantially covers the width of a printing surface to be controlled, characterized in that said CCD line camera (2), whose photosensitive elements produce a line which is many times shorter than the effective controlling length of the girder, is mounted directly on measuring girder 1 without an essential spacing between girder (1) and camera (2), and that a path (5) of light traveling from a printing surface to camera (2), on opposite side walls (11) of girder (1), is provided with mirrors (6, 7), located opposite to each other in a per se known manner and having between the alignments thereof a small angular variation of preferably 2-5 degrees, whereby the light of said path (5) reflects in a per se known manner several times between said mirrors (6, 7), and that a third mirror (8) deflects the light coming from a printing surface to one of said two opposite mirrors (6, 7).

2. An apparatus as set forth in claim 1, characterized in that the measuring result of CCD camera (2) is delivered to a computer (QCC, MCC), which continuously compares the measuring result with a preset reference level and produces an alarm if the deviation of the measuring result from the reference level exceeds a preset fluctuation range.

3. Application of an apparatus as set forth in claim 2, characterized in that the apparatus is used as a quality control apparatus for newspaper printing.

1/4

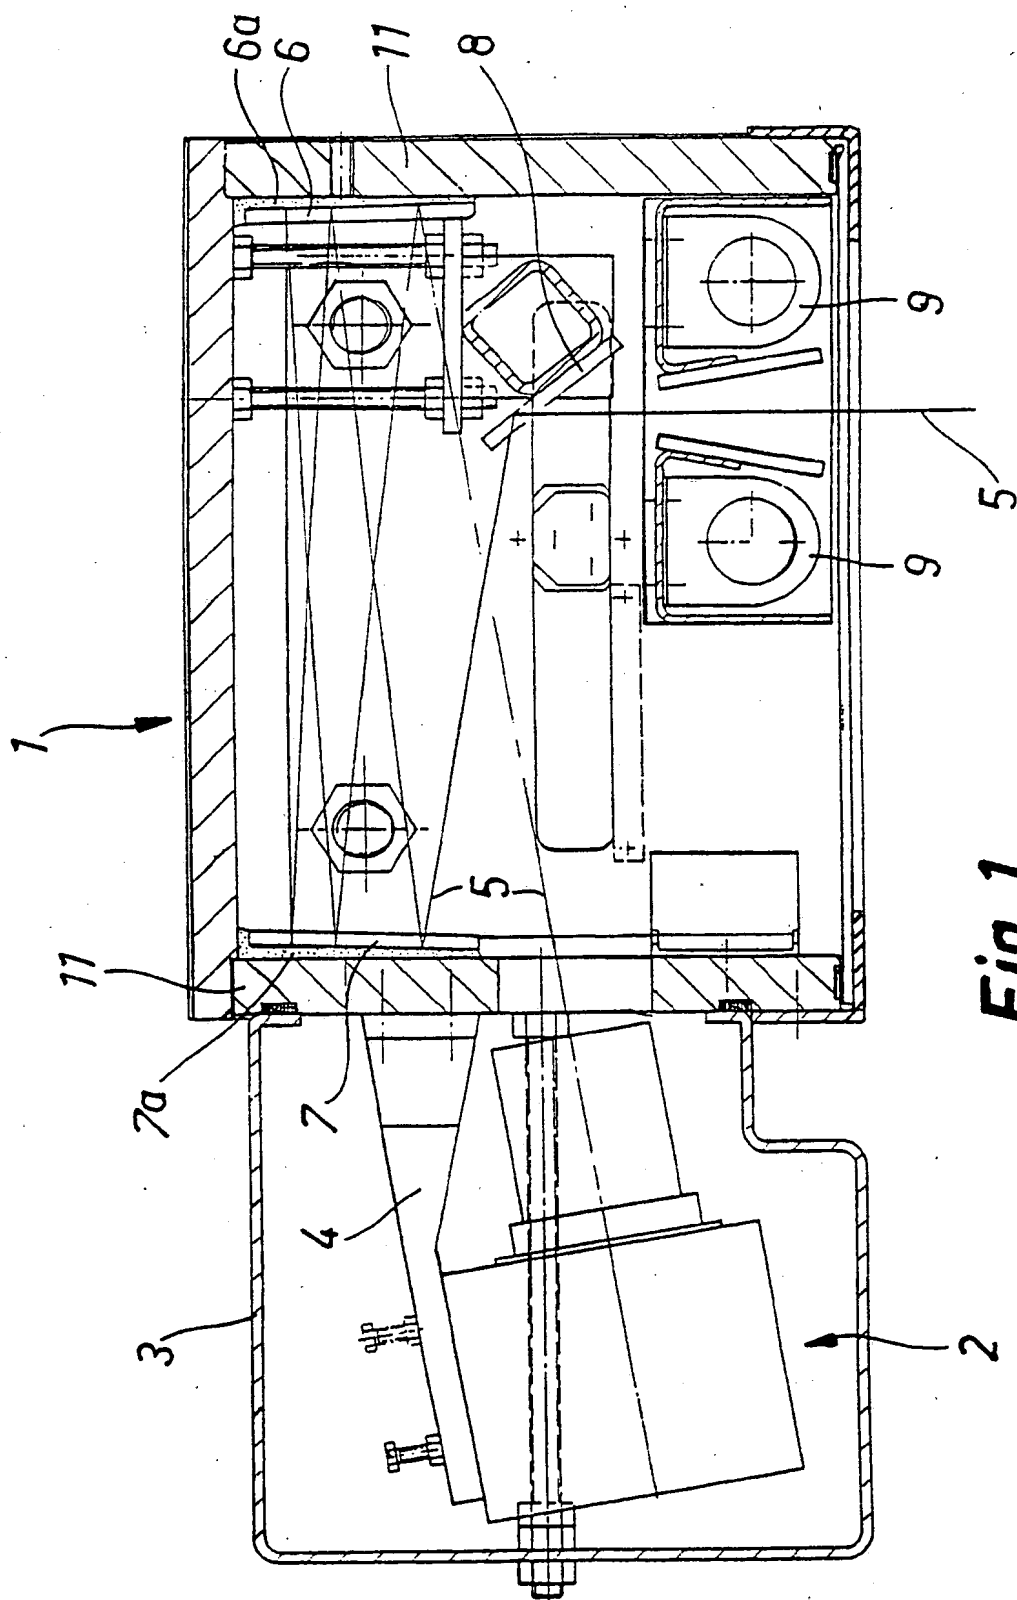
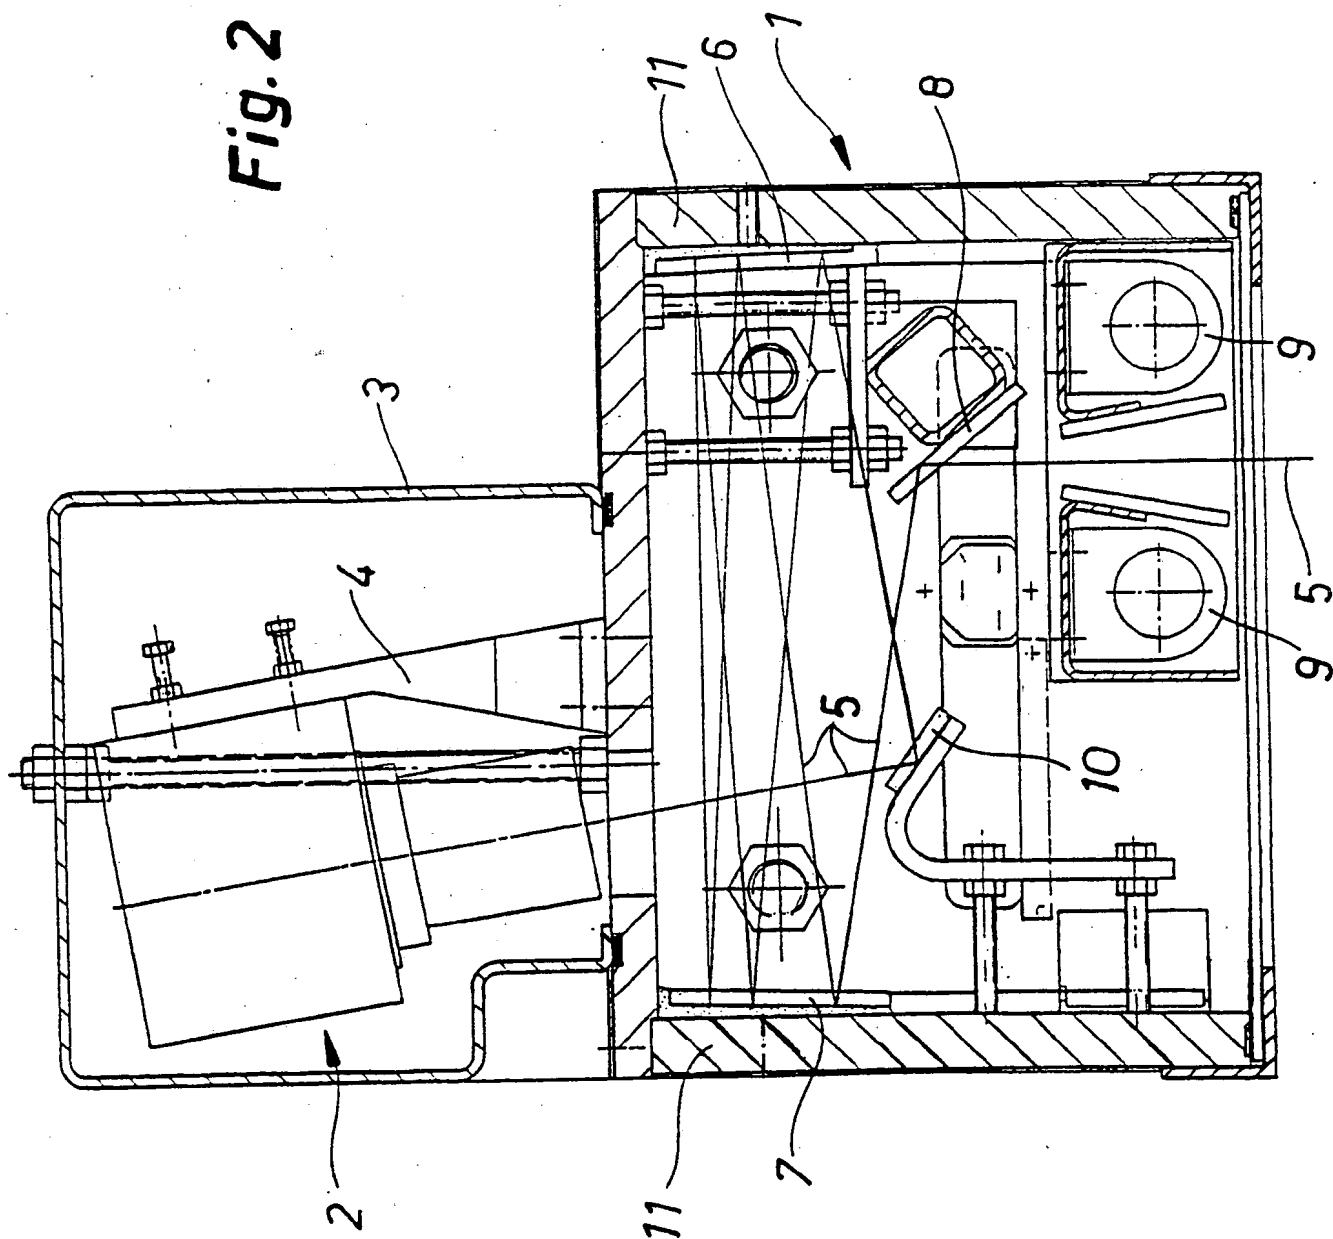


Fig. 1

Fig. 2



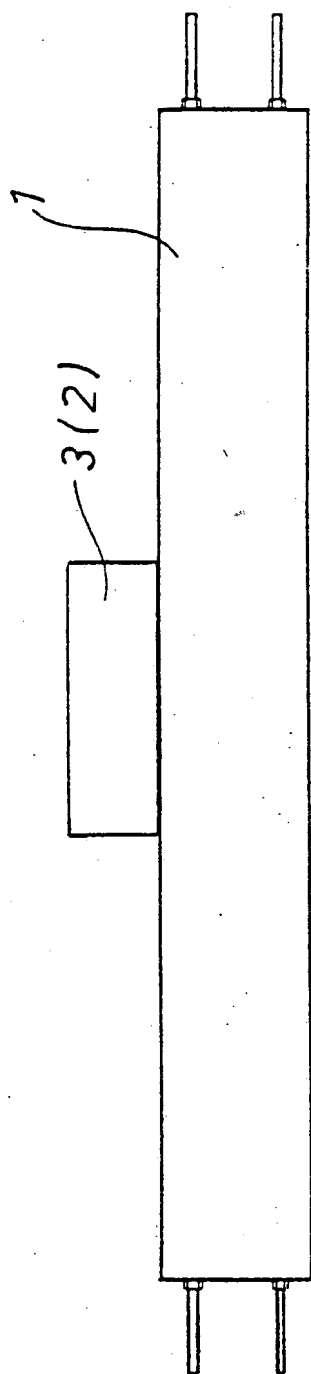


Fig. 3

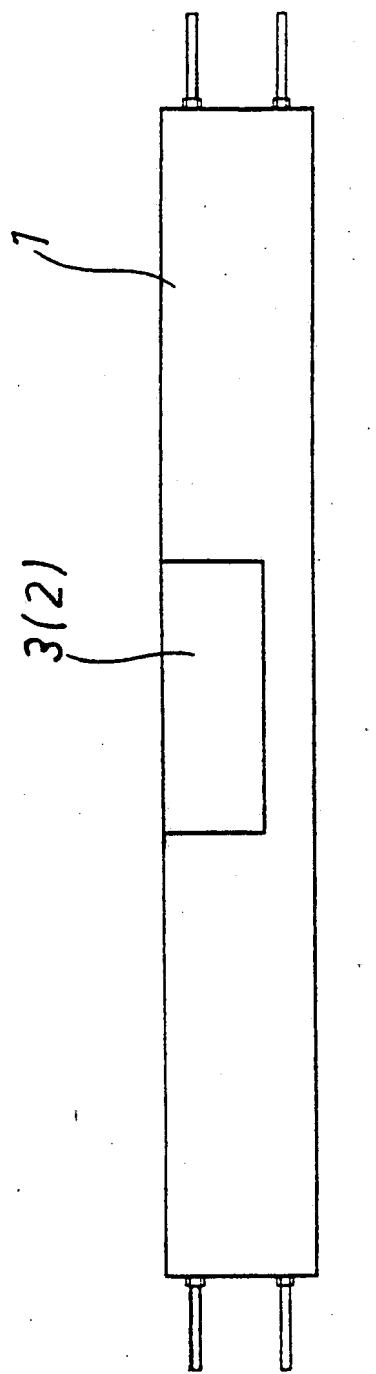
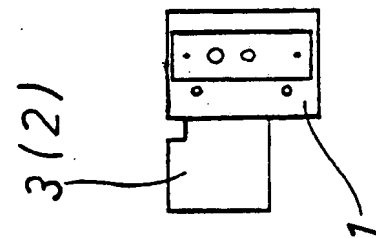



Fig. 4



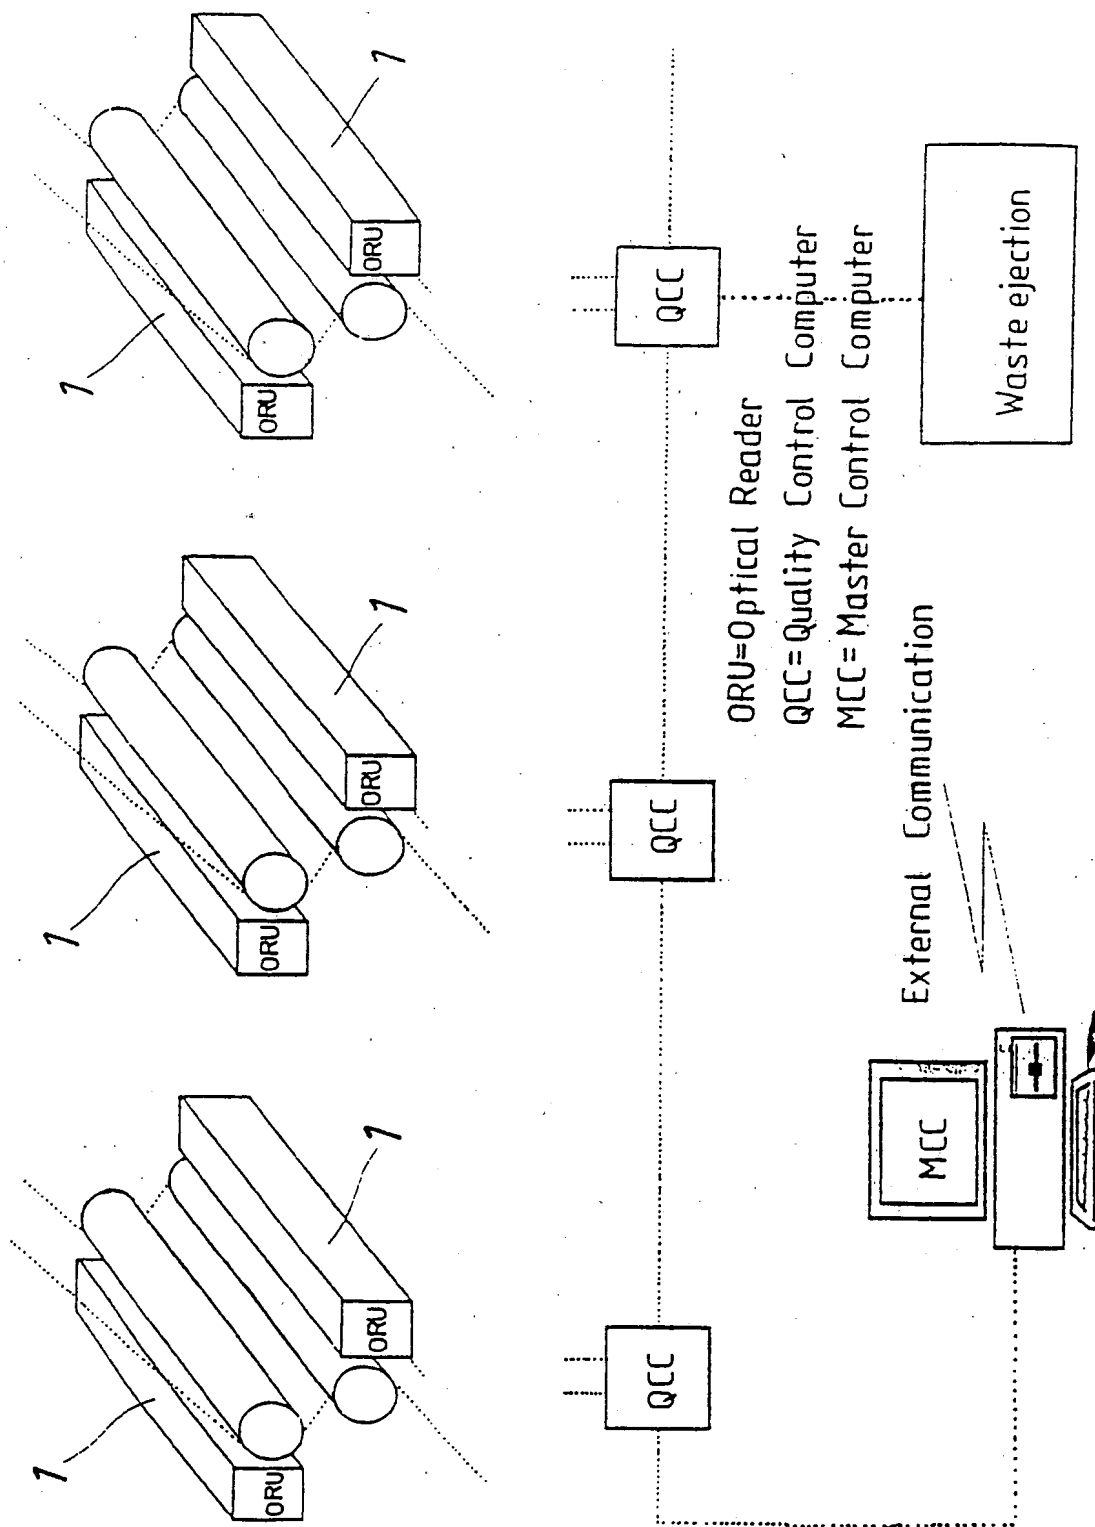


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 93/00424

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: B41F 33/00, H04N 7/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: B41F, H04N, G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI/L, CLAIMS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4561103 (S. HORIGUCHI ET AL), 24 December 1985 (24.12.85), column 1, line 5 - column 6, line 2, figures 1-5, abstract --	1-3
Y	GB, A, 2108283 (PITNEY BOWES INC., ET AL), 11 May 1983 (11.05.83), page 1, line 5 - line 45, figure 1 --	1-3
A	US, A, 4567506 (M. SHINODA ET AL), 28 January 1986 (28.01.86), column 1, line 5 - column 2, line 64, figures 1,2, abstract --	1.3

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 January 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055 S-102 42 STOCKHOLM

Date of mailing of the international search report

31 -01- 1994

Authorized officer

Bertil Ljungdahl

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 93/00424

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE, C2, 3534019 (ERWIN SICK GMBH OPTIK-ELEKTRONIK), 3 May 1989 (03.05.89), column 4, line 33 - column 5, line 50, figure 2 --	1-3
A	DE, C2, 3925614 (ERWIN SICK GMBH OPTIK-ELEKTRONIK), 30 January 1992 (30.01.92), figures 1,3-6 --	1-3
A	EP, A2, 0178037 (AERONCA ELECTRONICS, INC.), 16 April 1986 (16.04.86), figure 4, abstract -----	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/12/93

International application No.

PCT/FI 93/00424

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4561103	24/12/85	DE-C- 3248928	17/09/87
		GB-A, B- 2115145	01/09/83
		GB-A, B- 2150285	26/06/85
		GB-A, B- 2159622	04/12/85
		GB-A, B- 2159623	04/12/85
		JP-B- 1047823	17/10/89
		JP-C- 1579746	13/09/90
		JP-A- 58181175	22/10/83
		WO-A- 8300557	17/02/83
		JP-B- 1023818	09/05/89
		JP-C- 1541440	31/01/90
		JP-A- 58019979	05/02/83
		JP-C- 1579741	13/09/90
		JP-A- 58049262	23/03/83
		JP-B- 1047822	17/10/89
		JP-C- 1614471	15/08/91
		JP-A- 58081165	16/05/83
GB-A- 2108283	11/05/83	NONE	
US-A- 4567506	28/01/86	JP-B- 4024227	24/04/92
		JP-A- 59200927	14/11/84
DE-C2- 3534019	03/05/89	DE-A- 3709500	06/10/88
		FR-A- 2587802	27/03/87
		GB-A, B- 2180929	08/04/87
		JP-A- 62075233	07/04/87
		US-A- 4775238	04/10/88
DE-C2- 3925614	30/01/92	US-A- 5079434	07/01/92
EP-A2- 0178037	16/04/86	DE-A- 3584934	30/01/92
		JP-C- 1666303	29/05/92
		JP-B- 3029318	23/04/91
		JP-A- 61091985	10/05/86
		US-A- 4630276	16/12/86